

High Speed & Reliable 24-Pin Narrow / Wide Carriage Flatbed Impact Printer




DP660

High Speed & Reliable 24-Pin Narrow
Wide Carriage Flatbed Impact Printer

Highlights:


- Print width: 110 Columns
- Fast printing speed: 400CPS
- Better connectivity with:
USB2.0 Full-speed & Paralled interaface
- Optional interfaces:
Buluetooth/Wi-Fi/Ethernet
- Original + 6 copies

High Speed & Reliable 24-Pin Narrow / Wide Carriage Flatbed Impact Printer

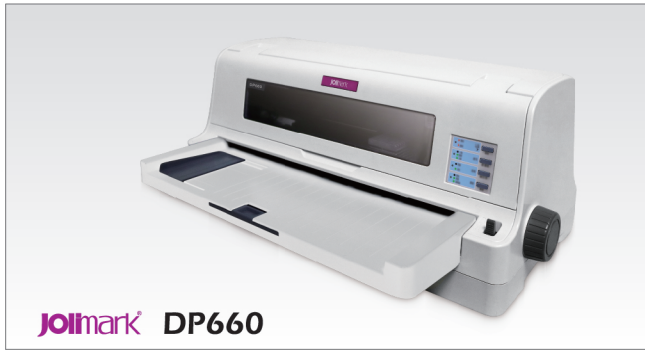

Specification:

| | | | |
|--------------------|---|-------------------|---------------------------------------|
| Print type | 24 Pins dot matrix impact | | |
| Print direction | Bi-directional with logic seeking | | |
| Print width | 110 column(10cpi)/ 279.4 mm | | |
| Print speed(10CPI) | Super high speed | 400 | CPS |
| | High speed | 300 | CPS |
| | Normal speed | 150 | CPS |
| Fonts | Draft, Roman, Sans Serif, Courier, Prestige, Script, OCR-A, OCR-B | | |
| Bar code | EAN-13, EAN-8, Interleaved 2 of 5, Matrix 2 of 5, Industrial 2 of 5, Code 39, Code 128 B, Code 128 C, Codabar | | |
| Character pitch | ASCII:10CPI ,12CPI,15CPI,proportional | | |
| Line space | 1/6 inch,1/8 inch, programmable in 1/360 inch increments | | |
| Emulation | EPSON ESC/PK2, OKI 5530SC, IBM 2391 | | |
| Interface | U USB 2.0 | S Serial | DP660 U P DP660W U P W |
| | P Parallel | E Ethernet | DP660E U P E DP660S U S |
| | B Bluetooth | | |
| | W Wi-Fi: 802.11b/g/n | | DP660B U P B |
| | | | |
| Buffer Memory | 256 KB | | |
| Ribbon | Model Life JMR 140 | | |
| | Life(draft mode) > 12 million characters | | |
| Noise | < 55dB(A)(ISO7779 standard) | | |
| Paper feed type | Cut sheet Front in, front out; front in, rear out | | |
| | Tractor paper Rear in, front out | | |
| Paper sepification | Cut sheet Width:55~355mm Length:67~536mm | | |
| | Tractor paper Width:76~340mm | | |

| | | |
|----------------------------------|--|---|
| Transverse certificate(Lay open) | Width:90-297mm | Length:75-300mm |
| | Thickness:1.8mm | |
| Max paper thickness | 2.0mm | |
| Copy | Original + 6 copies | |
| Compress printing | Support graphics and character compression printing, compression ratios are 50%, 66%, 75%, 100%, auto compress printing, select this function in the menu. | |
| Aptitude application | Paper edge detection, skew detection, black mark detection, paper thickness auto-adaption, Full slot paper feeding, copy capacity auto adjustment | |
| Special function | Pin Break Compensation, Pin Rotation Replacement, Automatic Emulation Match, Online Parameter Setting | |
| Dimension | 491mm(W) x 246mm(D) x 210mm(H) | |
| Weight | Approx. 6.1KG | |
| Environmental conditions | Operating | Working temperature: 5~40 C |
| | | Humidity: 25~80%RH(No condensation) |
| | Storage | Storage temperature: -40~55 C |
| | | Humidity: ≤93%RH(40 C, No condensation) |
| Power supply | Rated voltage 220V | |
| | Rated frequency range 50Hz | |
| Power consumption | ① Operating: 110 W; | |
| | ② Standby: Approximately 3.4 W | |
| Safety marks | GB4943 / EN60950 | |
| Certificate |  EN60950 | |

Note: 1. The technical specifications in this catalog are the laboratory measurement data which achieved under the national standard for the storage and work environment (room temperature), the specifications of the testing papers are specified in the Users' Manual.
 2. The technical specifications are subject to change without notice.
 3. All trademarks are the properties of their respective holders.

Jolimark®

Address: Unit 01, 23A/F, K.Wah Centre, 191 Java Road, North Point, Hong Kong
 Tel: (852) 25582457 Fax: (852) 28979610
 Email: sales@kongyue.com.hk Http://www.jolimark.com/en